


IP65 Projector LED 130W / IP65 130W Flood Light PRL130CW



SILBER SONNE
LED SYSTEMS

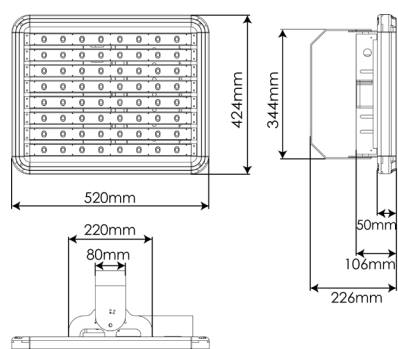

IP65 CRI > 70



Acabado:	Cover:
Plata	Silver
Material:	Material:
Aluminio	Aluminium
Sustituye:	Substitute:
Proyector convencional de 400W	Conventional 400W flood light
Consumo:	Consumption:
134W +/- 10%	134W +/- 10%
Tensión de trabajo:	Working voltage:
100-277V AC / 50~60Hz	100-277V AC / 50~60Hz
Número de LEDs:	Number of LEDs:
64 (Nichia NVSW)	64 (Nichia NVSW)
Temperatura de color:	Temperature colour:
4500-5500 K (blanco frío)	4500-5500 K (cold white)
Flujo luminoso:	Luminous flux:
13500 Lumens +/- 10%	13500 Lumens +/- 10%
Lux a 6 metros:	6 meters lux:
193 lux +/- 10%	193 lux +/- 10%
Eficiencia lumínica:	Lm/W Efficiency:
100 Lm/W	100 Lm/W
Tamaño:	Size:
(longitud)520mm x (anchura)424mm x (altura)226mm	(length)520mm x (width)424mm x (height)226mm
Vida útil aproximada:	Life span:
40000 horas	40000 Hours
Garantía:	Guarantee:
36 meses	36 months
Datos de embalaje:	Packing details:
1 ud. por caja / (largo)600mm x (ancho)504mm x (alto)210mm	1 ut. per box / (length)600mm x (width)504mm x (height)210mm

